

light sources

price list Q2 2024

b

Content

LED 12 V light sources

VIVID LED MR16	p.4
VIVID LED MR16 Snap	5
Snap Filters for MR16	6
VIVID LED AR111	8
VIVID LED AR111 Snap	9
Snap Filters for AR111	10
ALULINE LED	12
FILAMENT LED	12

LED 230 V light sources

VIVID LED MR16-GU10	14
VIVID LED MR16-GU10 Snap	15
Snap Filters for MR16-GU10	16

LED lamps from Soraa

Soraa offers high-quality LED light bulbs in various variants with excellent light quality.

You can find the entire range at www.soraa.com.

Feel free to contact us for personalized offers on additional light bulbs.



VIVID LED MR16

LED lamp QR-CBC51, GU5.3

- Ø 50 mm, L = 45,5 mm
- single source LED with single shadow for enhanced perception of textures and materials
- precise light distribution with very little spill
- CRI: $R_a > 95$ and $R_g \geq 95$
- excellent colour stability
- excellent white colour rendering
- long lifespan with 35000 h or 50 TSD switching cycles
- no UV/infrared radiation
- automatic power reduction in the event of overheating
- dimmable (observe recommended dimming levels!) to 20 %
- ignition time <0,2 secs
- energy efficiency class G

- Lux¹ = illuminance at the centre of the light source measured at the respective distance
- Lux² = illuminance at the edge of the beam of light

Technical data subject to change.
Current product specifications can be found at www.soraa.com


for shade types



tube



point




pinpin

technical data

7,5 W/25° 2700				7,5 W/36° 2700			
m	Ømm	Lux ¹	Lux ²	m	Ømm	Lux ¹	Lux ²
1	400	2260	1130	1	600	1070	535
2	900	565	283	2	1300	268	134
04-306				04-307			
9 W/25° 2700				9 W/36° 2700			
m	Ømm	Lux ¹	Lux ²	m	Ømm	Lux ¹	Lux ²
1	400	2570	1285	1	600	1210	605
2	900	642	321	2	1300	302	151
04-330				04-331			
7,5 W/25° 3000				7,5 W/36° 3000			
m	Ømm	Lux ¹	Lux ²	m	Ømm	Lux ¹	Lux ²
1	400	2400	1200	1	600	1130	565
2	900	600	300	2	1300	282	141
04-314				04-315			
9 W/25° 3000				9 W/36° 3000			
m	Ømm	Lux ¹	Lux ²	m	Ømm	Lux ¹	Lux ²
1	400	2700	1350	1	600	1280	640
2	900	675	338	2	1300	320	160
04-334				04-335			

Kelvin	lumen	lm/W	wattage beam angle	neadcode	article no.	€ Euro
2700 K	410	55	7,5 W/25°	00931	04-306	34,00
2700 K	410	55	7,5 W/36°	00943	04-307	34,00
2700 K	465	52	9 W/25°	00955	04-330 *	39,50
2700 K	465	52	9 W/36°	00963	04-331 *	39,50
3000 K	435	58	7,5 W/25°	00935	04-314	34,00
3000 K	435	58	7,5 W/36°	00947	04-315	34,00
3000 K	490	54	9 W/25°	00959	04-334 *	39,50
3000 K	490	54	9 W/36°	00967	04-335 *	39,50

* not to be used in recessed downlights or enclosed housings



VIVID LED MR16 Snap System

LED lamp QR-CBC51, GU5.3

- Ø 50 mm, L = 45,5 mm
- single source LED with single shadow for enhanced perception of textures and materials
- precise light distribution with very little spill
- CRI: $R_a > 95$ and $R_g \geq 95$
- excellent colour stability
- excellent white colour rendering
- long lifespan with 35000 h or 50 TSD switching cycles
- no UV/infrared radiation
- automatic power reduction in the event of overheating
- dimmable (observe recommended dimming levels!) to 20 %
- ignition time <0,2 secs
- energy efficiency class G

In addition to the above-mentioned features this 10° LED light source disposes over a self-centering magnet which allows a wide range of filters or honeycomb louvres to be clicked into place without tools. It is also possible to adjust the beam angle simply from 10° to 36°, for example, and to change the shape of the beam from circular to rectangular. The Snap system cuts down storage costs, given that only one type of light source needs to be ordered and used for multiple applications. Maximum flexibility up to the time of installation. Filters can be applied on a temporary basis for effect. Different combinations of filters can be applied. 10 % brightness loss should be reckoned for every filter applied.


- Lux¹ = illuminance at the centre of the light source measured at the respective distance
- Lux² = illuminance at the edge of the beam of light

Technical data subject to change.
Current product specifications can be found at www.soraa.com


for shade types



tube



point



pinpin


technical data

7,5 W/10° 2700			
m	Ømm	Lux ¹	Lux ²
1	200	5710	2855
2	300	1428	714
04-328			

7,5 W/10° 3000			
m	Ømm	Lux ¹	Lux ²
1	200	6000	3000
2	300	1500	750
04-332			

Kelvin	lumen	lm/W	wattage beam angle	neadcode	article no.	€ Euro
2700 K	390	52	7,5 W/10°	00919	04-328	34,00
3000 K	410	55	7,5 W/10°	00923	04-332	34,00

More information on Snap system filters can be found on the following pages.

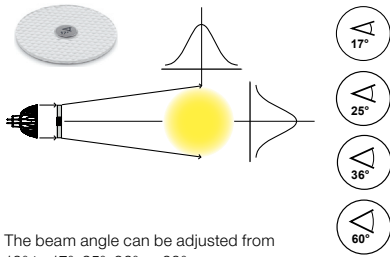


The beam angle can be adjusted from 10° to 17°, 25°, 36° or 60°.
Ø 50 mm, T = 2 mm

beam angle circular

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
17°	03263	409	7,00
25°	00325	410	7,00
36°	00327	411	7,00
60°	00329	412	7,00

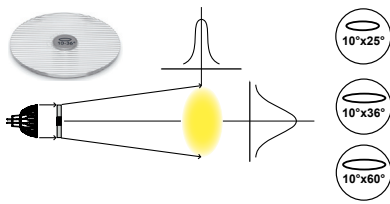


For the creation of asymmetric light beams, in particular for the illumination of linear objects. Given the oval shape of the light beam from just one light source per exhibit, fewer luminaires are required.
Ø 50 mm, T = 2 mm

beam angle oval

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
10° x 25°	00331	413	11,00
10° x 36°	00333	414	11,00
10° x 60°	03259	418	11,00

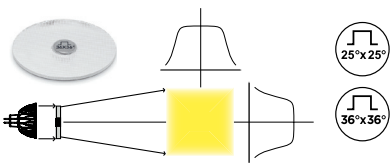


The circular shape of the 10° light beam is modified to generate a rectangular shaped beam: for square light fields on walls and floors. Uniform spread of light across the designated surface. No fading light along the edges.
Ø 50 mm, T = 2 mm

beam angle rectangular

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
25° x 25°	00335	415	11,00
36° x 36°	00337	416	11,00

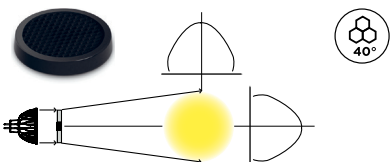


For glare control
Ø 51.1 mm, T = 9 mm

honeycomb louvre

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
40°	00339	417	11,00

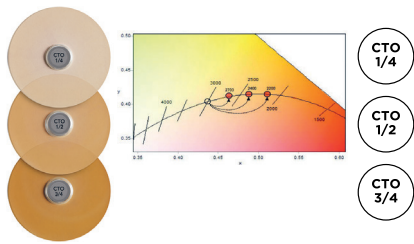


shifting colour temperature

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

For shifting the colour temperature to simulate dimmable warm white lighting conditions. Also on a temporary basis, for example on festive occasions.
Ø 50 mm, T=2 mm

Effect achieved:	1/4 CTO	1/2 CTO	3/4 CTO
Initial colour temp.	2450 K	2200 K	2000 K
2700 K	2700 K	2400 K	2200 K
3000 K			

CTO	neadcode	article no.	€ Euro
Colour Temperature Orange			
1/4	00323	400	11,00
1/2	00321	401	11,00
3/4	00319	402	11,00



colour enhancement filter

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

Filter for enhanced colour quality. Increases the vibrance of warm colours (red, orange and pink) and green. Ideal for applications where different colours need to be rendered perfectly. Underscores the richness of colours.
Ø 50 mm, T=2 mm

neadcode	article no.	€ Euro
03281	405	32,00




transparent filter

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

For application with coloured foil or dichroic filters to generate special atmospheres or effects.
Ø 50 mm, T=2 mm

neadcode	article no.	€ Euro
02183	403	6,50

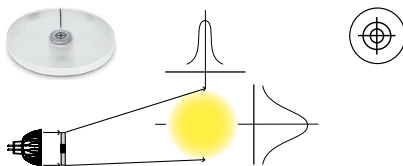


filter disc

accessories for VIVID LED MR16 (12 V) and fifty (48 V) with Snap System

Using two rotatable filter discs, the filter can change the beam spread from 0° to 20° without changing the colour temperature or the beam shape.
Ø 50 mm, T=2 mm

neadcode	article no.	€ Euro
03255	404	13,50



VIVID LED AR111

aluminium lamp QR111, GU53

for shade types




disc 111

- Ø 111 mm, L = 57 mm
- single source LED with single shadow for enhanced perception of textures and materials
- precise light distribution with very little spill
- Ra > 95 and R9 ≥ 95
- excellent colour stability
- excellent white colour rendering
- long lifespan with 35000 h or 50 TSD switching cycles
- no UV/infrared radiation
- automatic power reduction in the event of overheating
- dimmable (observe recommended dimming levels!) to 20 %
- ignition time <0,2 secs
- Lux¹ = illuminance at the centre of the light source measured at the respective distance
- Lux² = illuminance at the edge of the beam of light
- energy efficiency class G


Technical data subject to change.
Current product specifications can be found at www.soraa.com

technical data

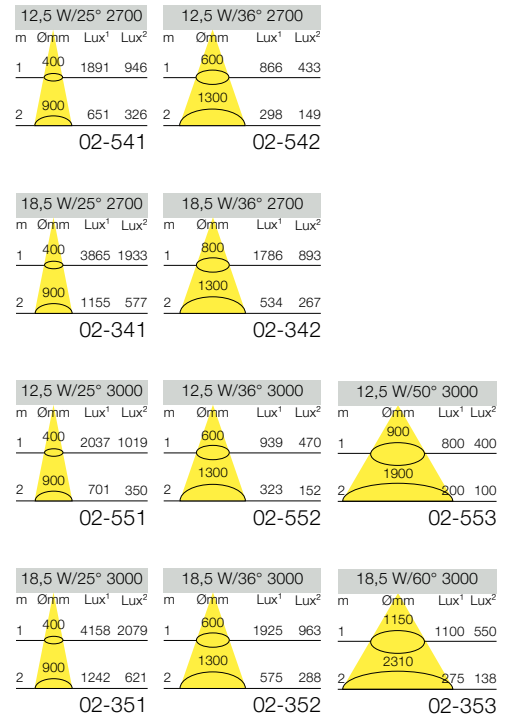

Kelvin	lumens	lm/W	wattage beam angle	neadcode	article no.	€ Euro
2700 K	575	46	12,5 W/25°	01429	02-541	61,50
2700 K	575	46	12,5 W/36°	01431	02-542	61,50
2700 K	930	50	18,5 W/25°	01027	02-341	70,50
2700 K	930	50	18,5 W/36°	01029	02-342	70,50
3000 K	620	50	12,5 W/25°	01445	02-551	61,50
3000 K	620	50	12,5 W/36°	01447	02-552	61,50
3000 K	620	50	12,5 W/50°	01449	02-553 *	61,50
3000 K	1000	54	18,5 W/25°	01043	02-351	70,50
3000 K	1000	54	18,5 W/36°	01045	02-352	70,50

* discontinued product



VIVID LED AR111 Snap System

aluminium lamp QR111, GU53

for shade types



disc 111

- Ø 111 mm
- single source LED with single shadow for enhanced perception of textures and materials
- precise light distribution with very little spill
- Ra > 95 and R9 ≥ 95
- excellent colour stability
- excellent white colour rendering
- long lifespan with 35000 h or 50 TSD switching cycles
- no UV/infrared radiation
- automatic power reduction in the event of overheating
- dimmable (observe recommended dimming levels!) to 20 %
- ignition time <0,2 secs
- energy efficiency class G

In addition to the above-mentioned features of the AR 111, these 8° or 9° LED light sources dispose over a self-centering magnet which allows a wide range of filters or honeycomb louvres to be clicked into place without tools. It is also possible to adjust the beam angle simply from 8°/9° to 36°, for example, and to change the shape of the beam from circular to rectangular.

The Snap system cuts down storage costs, given that only one type of light source needs to be ordered and used for multiple applications. Maximum flexibility up to the time of installation. Filters can be applied on a temporary basis for effect. Different combinations of filters can be applied. 10 % brightness loss should be reckoned for every filter applied.

- Lux¹ = illuminance at the centre of the light source measured at the respective distance
- Lux² = illuminance at the edge of the beam of light

Technical data subject to change. Current product specifications can be found at www.soraa.com


technical data

12,5 W/8° 2700				18,5 W/9° 2700			
m	Ømm	Lux ¹	Lux ²	m	Ømm	Lux ¹	Lux ²
1	100	9467	4734	1	200	17248	8624
2	300	3259	1630	2	300	5152	5276
02-540				02-340			

12,5 W/8° 3000				18,5 W/9° 3000			
m	Ømm	Lux ¹	Lux ²	m	Ømm	Lux ¹	Lux ²
1	100	10211	5106	1	200	18557	9279
2	300	3515	1758	2	300	5543	2772
02-550				02-350			

Kelvin	lumens	lm/W	wattage beam angle	neadcode	article no.	€ Euro
2700 K	575	46	12,5 W/8°	01427	02-540	57,50
2700 K	930	50	18,5 W/9°	01025	02-340	66,00
3000 K	620	50	12,5 W/8°	01443	02-550	57,50
3000 K	1000	54	18,5 W/9°	01041	02-350	66,00

More information on Snap system filters can be found on the following pages.

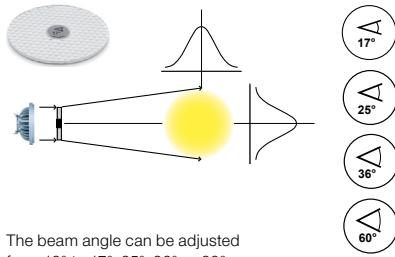


The beam angle can be adjusted from 10° to 17°, 25°, 36° or 60°.
Ø 84 mm, T=3.1 mm

beam angle circular

accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
17°	03265	439	9,50
25°	01145	440	9,50
36°	01147	441	9,50
60°	01149	442	9,50

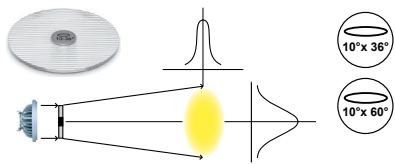


For the creation of asymmetric light beams, in particular for the illumination of linear objects. Given the oval shape of the light beam from just one light source per exhibit, fewer luminaires are required.
Ø 84 mm, T=3.1 mm

beam angle oval

accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
10° x 36°	01595	444	19,00
10° x 60°	03261	445	19,00

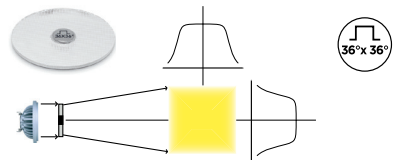


The circular shape of the 10° light beam is modified to generate a rectangular shaped beam: for square light fields on walls and floors. Uniform spread of light across the designated surface. No light fade along the edges.
Ø 84 mm, T=3.1 mm

beam angle rectangular

accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
36° x 36°	01597	451	19,00

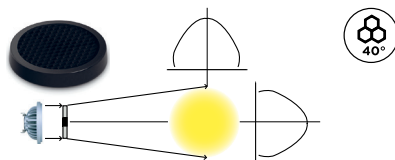


For glare control
Ø 84 mm, T=9 mm

honeycomb louvre

accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
40°	01151	447	19,00

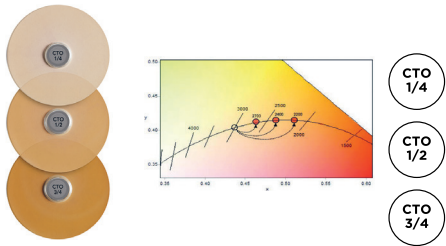

For shifting the colour temperature to simulate dimmable warm white lighting conditions. Also on a temporary basis, for example on festive occasions.
 Ø 84 mm, T=3.1 mm


Effect achieved:

Initial colour temp.	1/4 CTO	1/2 CTO	3/4 CTO
2700 K	2450 K	2200 K	2000 K
3000 K	2700 K	2400 K	2200 K

shifting colour temperature



accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

CTO	neadcode	article no.	€ Euro
1/4	01153	430	19,00
1/2	01155	431	19,00
3/4	01157	432	19,00



SORAA VIVID

ENHANCE SNAP



Filter for enhanced colour quality. Increases the vibrance of warm colours (red, orange and pink) and green. Ideal for applications where different colours need to be rendered perfectly. Underscores the richness of colours.
 Ø 84 mm, T=3.1 mm

colour enhancement filter

accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

neadcode	article no.	€ Euro
03283	450	65,00




For application with coloured foil or dichroic filters to generate special atmospheres or effects.
 Ø 84 mm, T=3.1 mm

transparent filter

accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

neadcode	article no.	€ Euro
02185	448	9,00

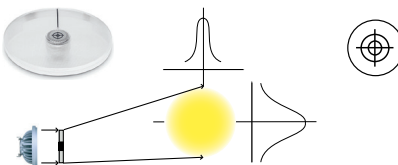

Using two rotatable filter discs, the filter can change the beam spread from 0° to 20° without changing the colour temperature or the beam shape.
 Ø 84 mm, T=3.1 mm

filter disc

accessories for VIVID LED AR111 (12 V) and ninety-five (48 V) with Snap System

neadcode	article no.	€ Euro
03257	449	17,50



ALULINE LED

LED reflector lamp QR-C38, B15d


for shade types *

technical data

- 25000 h
- Ø 37 mm, L=42 mm
- LED retrofit light source
- colour rendering >92
- long lifespan
- no UV/infrared radiation
- dimmable
- energy efficiency class G



b15



- Lux¹ = illuminance at the centre of the light source measured at the respective distance
- Lux² = illuminance at the edge of the beam of light

Kelvin	Lumen	wattage beam angle	article no.	€ Euro
2700 K	240	5 W/35°	96	54,50

* Shade type b15 is no longer available.
Aluline LED for light source replacement

FILAMENT LED


pin-base lamp LED, G4




for shade types

technical data

- 25000h
- Ø 9 mm
- L = 20 mm
- 130 lumens (similar to 10W halogen)
- silicone encapsulation
- not dimmable
- energy efficiency class G



mirror luminaires



Kelvin	Lumen	wattage beam angle	article no.	€ Euro
3000 K	130	1,5 W/330°	89	7,50

LED 230 V light sources



VIVID LED GU10 - 230 V


MR16, GU10 LED reflector lamp

- 35000 h
- Ø 50 mm, L = 53.5 mm
- single source LED with single shadow for enhanced perception of textures and materials
- precise light distribution with very little spill
- excellent colour rendering > RA95 and R9 95, for vibrant, lifelike colours
- excellent colour stability
- the only LED that radiates light across the entire visible spectrum
- excellent white colour rendering
- long lifespan with 35000 h or 50 TSD switching cycles
- no UV/infrared radiation
- automatic power reduction in the event of overheating
- dimmable with trailing edge
- energy efficiency class G

- Lux¹ = illuminance at the centre of the light source measured at the respective distance
- Lux² = illuminance at the edge of the beam of light


Technical data subject to change.
Current product specifications can be found at www.soraa.com

technical data

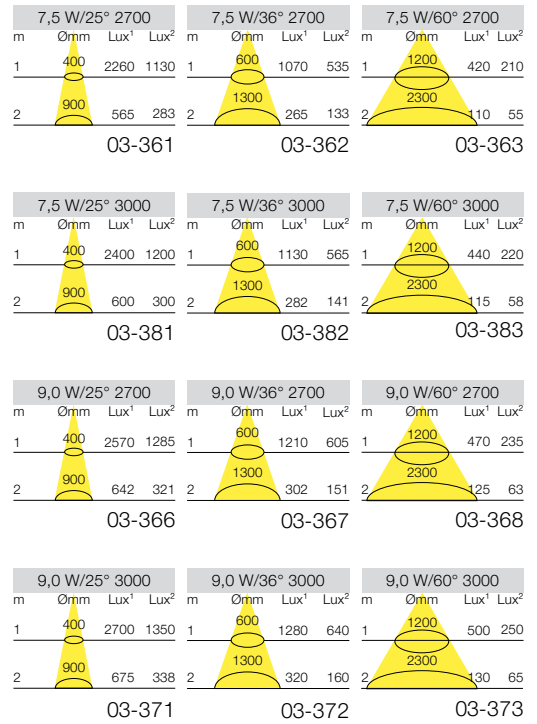

Kelvin	lumens	Lm/W	wattage beam angle	neadcode	article no.	€ Euro
2700 K	410	55	7,5 W / 25°	01087	03-361	39,50
2700 K	410	55	7,5 W / 36°	01099	03-362	39,50
2700 K	410	55	7,5 W / 60°	01585	03-363	39,50
3000 K	435	58	7,5 W / 25°	01091	03-381	39,50
3000 K	435	58	7,5 W / 36°	01103	03-382	39,50
3000 K	435	58	7,5 W / 60°	01589	03-383	39,50
2700 K	465	49	9,0 W / 25°	01969	03-366 *	43,50
2700 K	465	49	9,0 W / 36°	01977	03-367 *	43,50
2700 K	465	49	9,0 W / 60°	01985	03-368 *	43,50
3000 K	490	52	9,0 W / 25°	01973	03-371 *	43,50
3000 K	490	52	9,0 W / 36°	01981	03-372 *	43,50
3000 K	490	52	9,0 W / 60°	01989	03-373 *	43,50

*not to be used in recessed downlights or enclosed housings



VIVID LED GU10 - 230 V Snap System

MR16, GU10 LED reflector lamp

- 35000 h
- Ø 50 mm, L = 53.5 mm
- single source LED with single shadow for enhanced perception of textures and materials
- precise light distribution with very little spill
- excellent colour rendering > RA95 and R9 95, for vibrant, lifelike colours
- excellent colour stability
- the only LED that radiates light across the entire visible spectrum
- excellent white colour rendering
- long lifespan with 35000 h or 50 TSD switching cycles
- no UV/infrared radiation
- automatic power reduction in the event of overheating
- dimmable with trailing edge
- energy efficiency class G

In addition to the above-mentioned features this 10° LED light source disposes over a self-centering magnet which allows a wide range of filters or honeycomb louvres to be clicked into place without tools. It is also possible to adjust the beam angle simply from 10° to 36°, for example, and to change the shape of the beam from circular to rectangular.

The snap system cuts down storage costs, given that only one type of light source needs to be ordered and used for multiple applications. Maximum flexibility up to the time of installation. Filters can be applied on a temporary basis for effect. Different combinations of filters can be applied. 10% brightness loss should be reckoned for every filter applied.

- Lux¹ = illuminance at the centre of the light source measured at the respective distance
- Lux² = illuminance at the edge of the beam of light

Technical data subject to change.
Current product specifications can be found at www.soraa.com


technical data

7,5 W/10° 2700			
	Ømm	Lux	Lux ²
1	200	5710	2855
2	300	1425	713
03-360			

7,5 W/10° 3000			
m	Ømm	Lux ¹	Lux ²
1	200	6000	3000
2	300	1500	750
03-380			

Kelvin	lumens	Lm/W	wattage beam angle	neadcode	article no.	€ Euro
2700 K	390	52	7,5 W / 10°	01075	03-360	36,50
3000 K	410	55	7,5 W / 10°	01079	03-380	36,50

More information on Snap System filters can be found on the following pages.

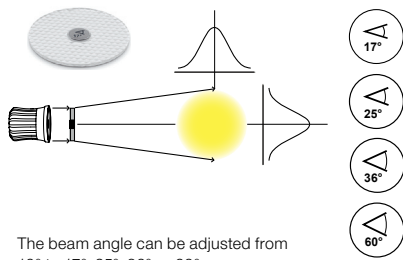


The beam angle can be adjusted from 10° to 17°, 25°, 36° or 60°.
Ø 50 mm, T=2 mm

beam angle circular

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
17°	03263	409	7,00
25°	00325	410	7,00
36°	00327	411	7,00
60°	00329	412	7,00

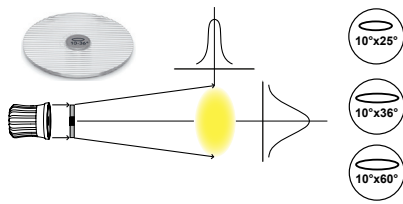


For the creation of asymmetric light beams, in particular for the illumination of linear objects. Given the oval shape of the light beam from just one light source per exhibit, fewer luminaires are required.
Ø 50 mm, T=2 mm

beam angle oval

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
10°x25°	00331	413	11,00
10°x36°	00333	414	11,00
10°x60°	03259	418	11,00

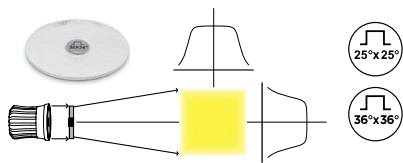


The circular shape of the 10° light beam is modified to generate a rectangular shaped beam: for square light fields on walls and floors. Uniform spread of light across the designated surface. No fading light along the edges.
Ø 50 mm, T=2 mm

beam angle rectangular

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
25°x25°	00335	415	11,00
36°x36°	00337	416	11,00

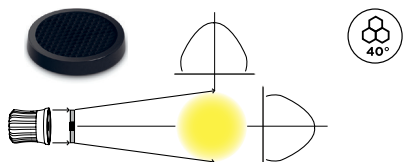


For glare control
Ø 51,1 mm, T=9 mm

honeycomb louvre

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

beam angle	neadcode	article no.	€ Euro
40°	00339	417	11,00

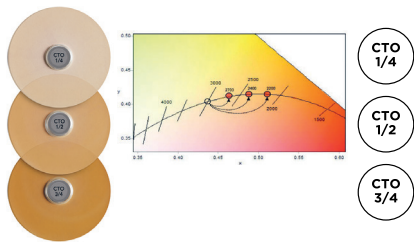

For shifting the colour temperature to simulate dimmable warm white lighting conditions. Also on a temporary basis, for example on festive occasions.
 Ø 50 mm, T=2 mm


Effect achieved:

Initial colour temp.	1/4 CTO	1/2 CTO	3/4 CTO
2700 K	2450 K	2200 K	2000 K
3000 K	2700 K	2400 K	2200 K

shifting colour temperature

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

CTO	neadcode	article no.	€ Euro
Colour Temperature Orange			
1/4	00323	400	11,00
1/2	00321	401	11,00
3/4	00319	402	11,00



Filter for enhanced colour quality. Increases the vibrance of warm colours (red, orange and pink) and green. Ideal for applications where different colours need to be rendered perfectly. Underscores the richness of colours.
 Ø 50 mm, T=2 mm

colour enhancement filter

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

neadcode	article no.	€ Euro
03281	405	32,00




For application with coloured foil or dichroic filters to generate special atmospheres or effects.
 Ø 50 mm, T=2 mm

transparent filter

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

neadcode	article no.	€ Euro
02183	403	6,50

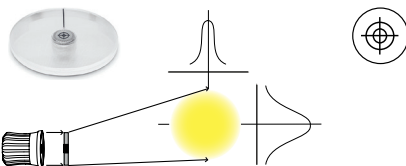

Using two rotatable filter discs, the filter can change the beam spread from 0° to 20° without changing the colour temperature or the beam shape.
 Ø 50 mm, T=2 mm

filter disc

accessories for VIVID LED MR16 (230 V), MR16 (12 V) and fifty (48 V) with Snap System

neadcode	article no.	€ Euro
03255	404	13,50

buschfeld

Fon +49 221 93764-0 Fax -79

info@buschfeld.de

buschfeld Design GmbH

Dillenburger Str. 97 D-51105 Köln

www.buschfeld.de

b